
















KOKKUPANEKUJUHEND / ASSEMBLY INSTRUCTION

TÖÖTOOL RAGUSA / TASK CHAIR RAGUSA 27715, 27716, 27717, 27718


HOME
4 YOU

A		SELJATUGI 1tk BACK REST 1pc
B		ISTE 1tk SEAT 1pc
C		KÄETUGI 2tk ARMS 2pcs
D		MEHCHANISM 1tk MECHANISM 1pc
E		RIST 1tk BASE 1pc
F		GAASPUMPMEHCHANISM 1tk PNEUMATIC CYLINDER 1pc
G		RATAS 5tk CASTOR 5pcs
H		PEATUGI 1tk HEAD REST 1tk
I		KRUVI M6x25mm 6tk SCREW M6x25mm 6pcs
J		KRUVI M6x20mm 4tk SCREW M6x20 4pcs
K		KRUVI M6x35mm 4tk SCREW M6x35mm 4pcs
L		VÕTI 1tk ALLEN KEY 1tk
M		KATE 4tk CAP COVER 4pcs
N		SEIB 4tk WASHER 4pcs



SAMM 1 Asetage rist E tagurpidi tasasele alusele ja paigaldage rattad G. Tõstke rist õigetpidi ja paigaldage gaaspumpmehhanism F risti keskel olevasse auku.

STEP 1 Set the base E upside down, insert castors G. Flip the base upright, insert pneumatic cylinder F into the center hole on the base.


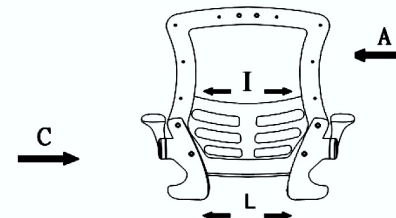


SAMM 2 Ühendage käetoed C seljatoega B. Kinnitage kruvidega I. Katke kruviaugud katetega M.

STEP 2 Attach arms C with back rest A with screws I, lock them tightly, put on cover caps M on the holes of arms.


SAMM 3 Kinnitage käetoed C istme B külge kruvidega K. ja seibidega N.

STEP 3 Fix arms C to seating B with screws K. and washers N.

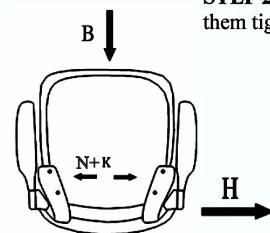

SAMM 4 Asetage mehhanism D oma kohale toolipõhja all. Kinnitage kruvidega J. Reguleerimiskang peab jääma külje poole.

STEP 4 Put mechanism D on the seating B, fix it with screws J, keep the tension knob in the front of seating.

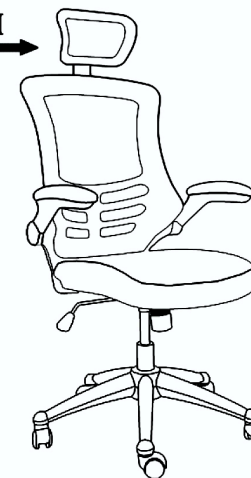

SAMM 5 Asetage peatugi H omakohale ja kinnitage kruvidega I.

STEP 5 Aim head rest H at back rest A, put screws I into back rest A and screw it tightly.